NEXXT Spine
GROW WITH US

# Product Brochure
## NEXXT MATRIXX® Stand Alone Cervical

Scaffold Architecture

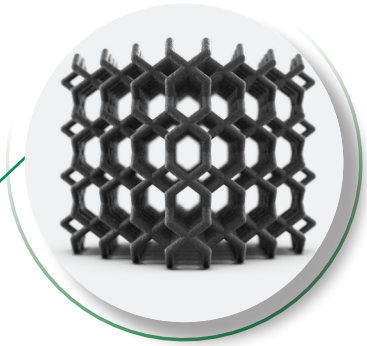

One-Step Turn Lock

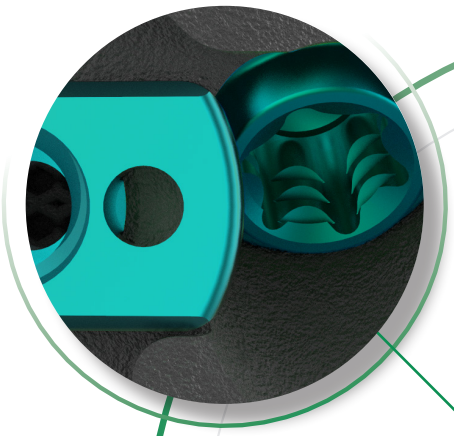

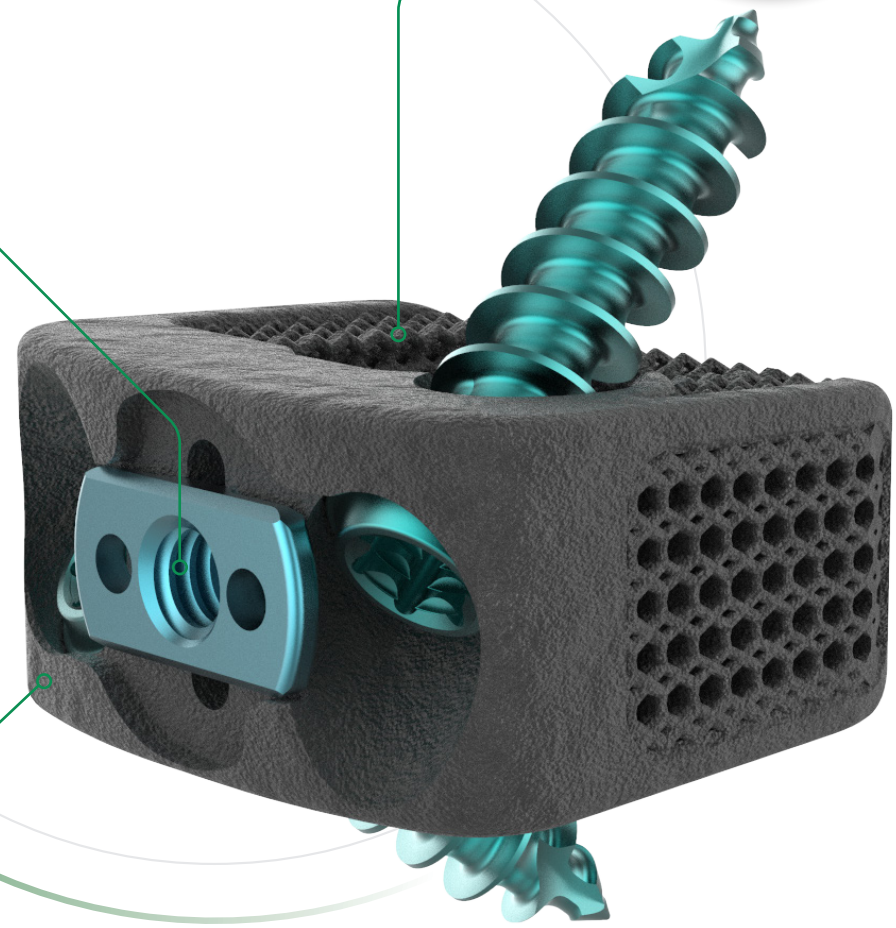

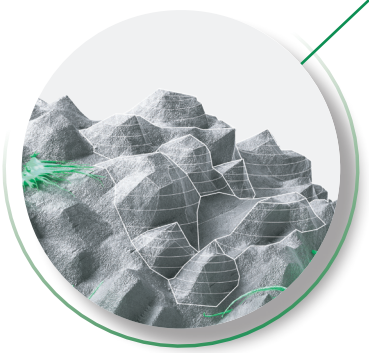

Micro Roughened Topography

NEXXT Spine

317-436-7801
Info@NexxtSpine.com
14425 Bergen Blvd, Suite B
Noblesville, IN 46060
70-075E, Rev C

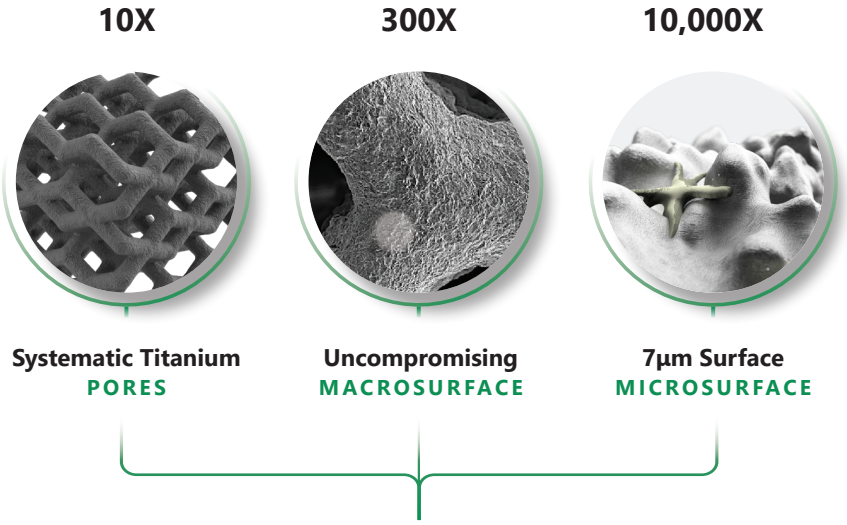


One-Step Turn Lock



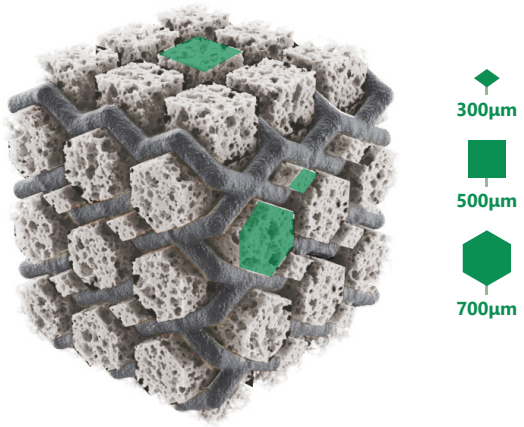


*Image represents potential boney ingrowth*

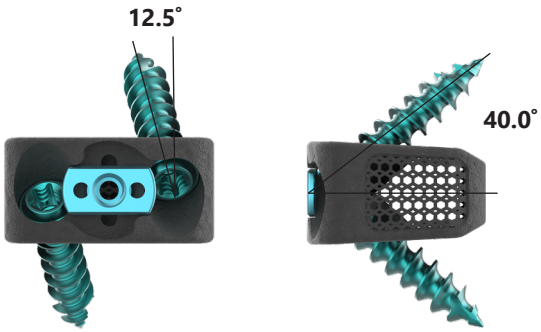


## TI PORES

- NEXXT MATRIXX® exhibits three pore sizes of 300, 500, and 700µm.
- Minimized titanium material resulting in a 75% open porous architecture.

## SURFACE

- Nexxt Spine has developed a proprietary, residue-free, micro-roughening process that creates a highly cohesive 7µm roughened topography.
- Due to the micro-roughened porous structure of the NEXXT MATRIXX® titanium, the implants exhibit up to 4X more surface area for bone apposition and potential bony integration than conventional spinal implants.

## IMPLANT OFFERING:

**FOOTPRINTS:**
12Dx15Wx5-10Hmm // 11+12mm
14Dx16Wx5-10Hmm // 11+12mm
16Dx18Wx5-12Hmm

**LORDOSIS:**
6˚
10˚



**SCREWS:**
∅3.5x12, 14, and 16 // 18mm
∅4.0x12, 14, and 16 // 18mm

Made to order.

## INSTRUMENTATION

- Integrated Guide + Instrument Design
- Fast + Accurate
- Minimal Exposure

## 3 SELF-GUIDED STYLES:

### 1. STRAIGHT
Awl • Drill • Hex Driver

### 2. POLY ANGLE: 360° RADIAL RANGE
Awl • Drill • Hex Driver

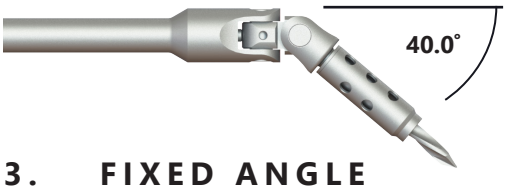


### 3. FIXED ANGLE
Awl • Drill • Hex Driver


LOCATE

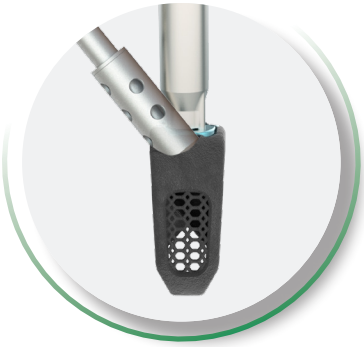

DOCK

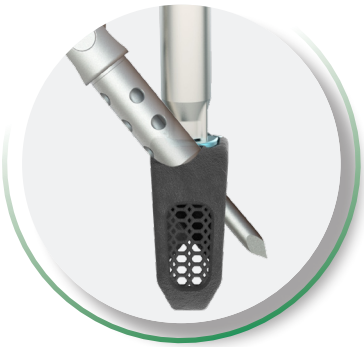

PLUNGE

## OPTIONAL GUIDE HEAD

1. Insert Cage
2. Drill/Awl
3. Insert Screw
4. Remove Inserter